Ceiling LED Chandelier

CH65127-UNV

INSTALLATION SHEET

START FROM HERE


- Make sure POWER is COMPLETELY OFF at the fuse box
- · Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- 4. Secure mounting plate (1c) to mounting surface with screws (1g) and anchors (1f)
- 5. Attach aircraft cable (4b) to mounting plate (1c)
- 6. See Page 2 for fixture body assembly
- 7. Determine hanging height of fixture by securing rods (2d) to canopy (2a) and fixture rod (5b) after feeding fixture wires (LED+ and LED-) through rods
- 8. Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- **9**. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package and place driver (4a) inside canopy (2a)
- 10. Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- · Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- · Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application • 120-277V input

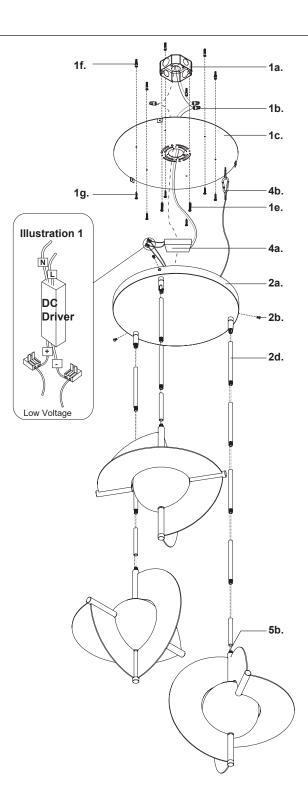



Ceiling LED Chandelier

Please Note:

• 120-277V input

• This Kuzco LED fixture comes with pre-wired LED module(s)

contact with the module could cause permanent damage

• Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary

· Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application

CH65127-UNV INSTALLATION SHEET


START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926


Fixture Body Assembly

 Secure shades (5a) to fixture rod (5b) with screws (5c). Repeat for bottom section

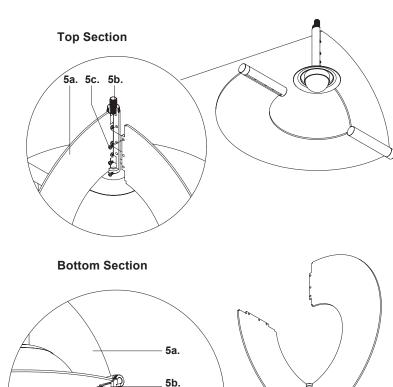


5c.

 Attach glass (6a) to top section by threading clockwise to secure. Attach screw cover (6c) to fixture rod (5b) and secure with finial (6b) by threading clockwise



 Attach bottom section to top section with screws (6a), followed by screw cover (6c) and secure with finial (6b) by threading clockwise



19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20250107